


# Nikka Densok HDB-II-AST Pinhole Inspector



## Specifications

<i>Inspection Method</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<i>High Frequency High Voltage</i>
<i>Processing Speed</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	10 ~ 15mm dia. <input type="checkbox"/> 24,000 pcs./hour
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16 ~ 22mm dia. <input type="checkbox"/> 15,000 pcs./hour
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	23 ~ 26mm dia. <input type="checkbox"/> 12,000 pcs./hour
<i>Product Electrical Conductivity</i>	<input type="checkbox"/>	<input type="checkbox"/>		1.5 $\mu$ S/cm <sup>2</sup>
<i>Infeed Section</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Flat conveyor belt
<i>Discharge/Reject Unit</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Starwheel with tray off
<i>Electrical Supply</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200 ~ 480VAC, 50/60Hz, 3 phase
<i>Power Consumption</i>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	2KVA
<i>Compressed Air</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	200 lit./min.
<i>Machine Weight</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1200kg (approximate)

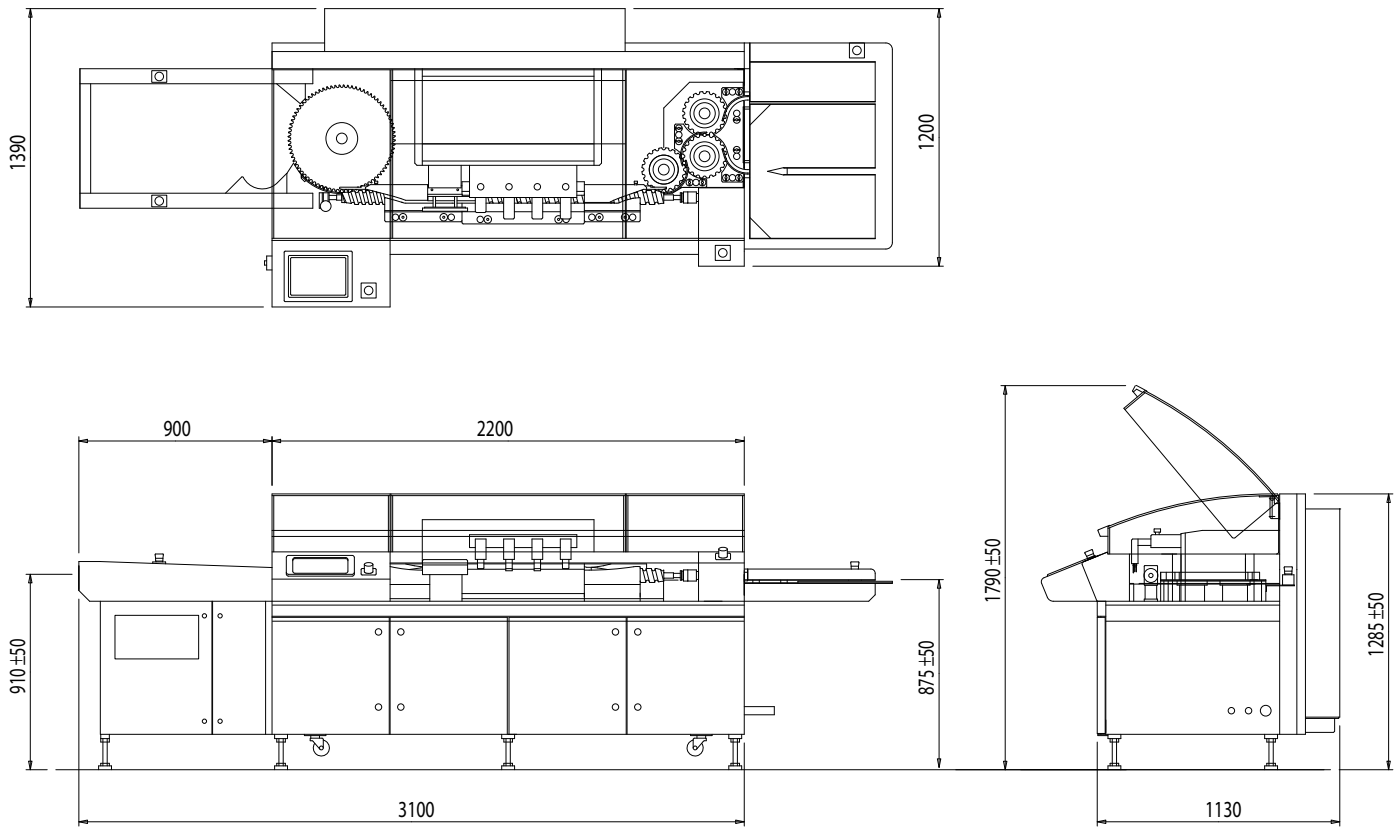

## NIKKA DENSOK U.S.A., INC.

610 Garrison Street Suite D

Lakewood CO 80215

Tel: (303) 202-6190 Fax: (303) 202-6195

www.nikkadensok.com E-Mail: nikkausa@aol.com