


Nikka Densok HDT-1 Pinhole Inspector



Specifications

Inspection Method	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	High Frequency High Voltage
Processing Speed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	10 pieces per minute
Product Electrical Conductivity	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1.5 μ S/cm ²
Infeed Section	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Slide Conveyor
Electrical Supply	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	110VAC, 50/60Hz
Power Consumption	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1KVA
Machine Weight	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	300 lbs. (approximate)

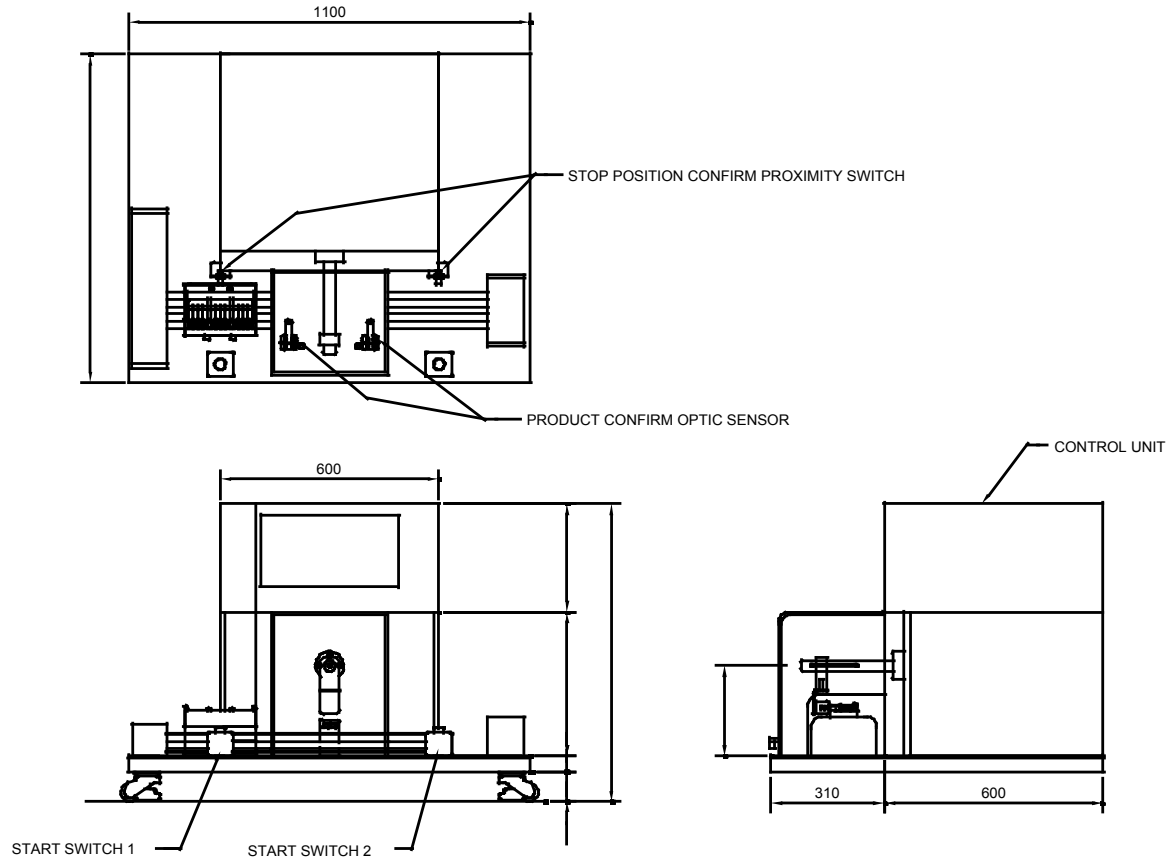

NIKKA DENSOK U.S.A., INC.

610 Garrison Street Suite D
Lakewood CO 80215

Tel: (303) 202-6190 Fax: (303) 202-6195

www.nikkadensok.com E-Mail: brian@nikkadensok.com